



LE-1600A 16x16 Audio

LE-1600V 16x16 Video

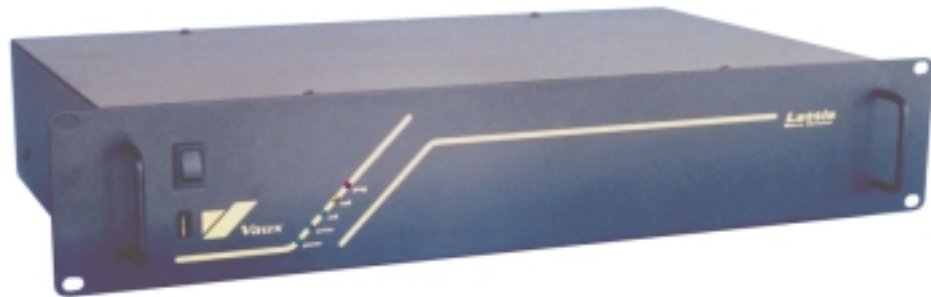

The Lattis Family of Matrix Switchers provides simple solutions for routing stereo-audio and composite-video signals - with full **volume-control** on all zones. A complete RS-232 protocol, as well as infrared control capability, allow a flexible, and expandable, multi-zone A/V system.

- **Volume, Bass, Treble, Balance, and Mute for each zone**
- Stack multiple switchers for up to **255 total stereo zones**
- High-fidelity stereo audio
- NTSC/PAL composite video
- Fully buffered in and out
- **Control via RS-232, or IR remote.**
- Breakaway switching commands: A/V, Audio-only, or Video-only.
- **Zone-Clusters** group zones for concurrent routing/volume, in addition to independent control
- Any zone can be Mono (same source, independent L & R volume)
- **Programmable** for each zone's min/max/initial-volume, mute-level, volume-taper-rates, etc.
- **Source-Leveling** for input trim
- **Balanced** in/out converters available.

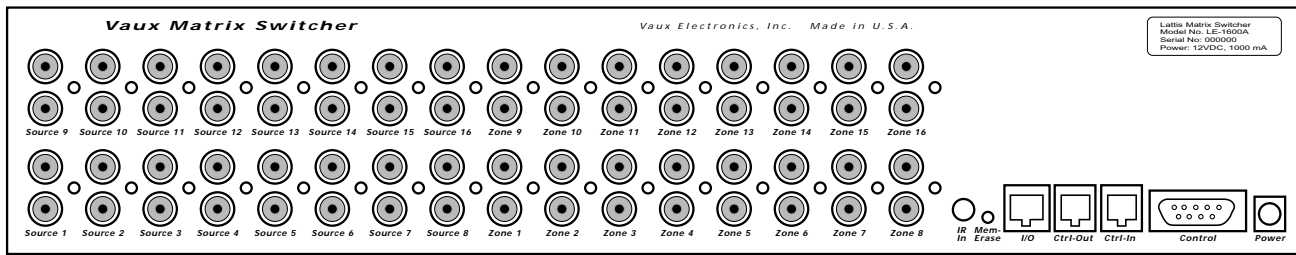

LE-1600A rear panel

Lattis Family Specifications:

Audio Section:

Volume Adjustment Range (2 dB/step; off < -80 dB)	-80, then -62 to +6 dB
Bass Adjustment Range (3 dB/step)	-12 to +12 dB
Treble Adjustment Range (3 dB/step)	-12 to +12 dB
Input Impedance	47K ohm typ.
Output Impedance	100 ohm typ.
Frequency Response (into 47K ohm load; -3 dB rolloff)	20 Hz to 100 KHz
Input Signal Handling	2 Vrms max.
Zone Programmable: Min/Max/Initial Volume, Mute level, Mono/Stereo, etc.	

Video Section:

Input Impedance	75 ohms
Output Impedance	75 ohms
3 dB Bandwidth	12 MHz
Differential Gain	0.5% typ.
Differential Phase	1 degree typ.
Non-Linearity	0.5% typ.

Input/Output Connectors

Sources: Stereo Line-Level Audio and Composite Video Inputs	Phono
Zones: Stereo Line-Level Audio and Composite Video Outputs (each video source has a buffered output, and each video zone has two outputs)	Phono
Control: RS-232 Control Port	DB-9 F
Ctrl-Out: Expansion Port Out for RS-232 Daisy-Chain	6P6C
Ctrl-In: Expansion Port In for RS-232 Daisy-Chain	6P6C
I/O: Digital In/Out (1 ea.) and RS-485 Network	8P8C
IR-In: Infrared Control Input Port (40-KHz modulated)	3.5 mm phone
Power: Jack for 12 VDC Adapter (auto-polarity)	2.1 mm

Other:

Power Consumption	12 VDC @ 1000 mA
Dimensions (2U rack chassis) (48cm W x 9cm H x 25cm D)	19" W x 3.5" H x 10" D
Weight (26 kilos)	12 lbs

DSLLE1600-1101



7601 East Main, Ste. 107, Mesa, AZ 85207 USA
 FAX: (480) 354-5558 • PHONE: (480) 354-5556
 www.vauxelectronics.com • sales@vauxelectronics.com

Altrix, Aris, Lattis, MediaMation, SmartPower, Vaux, VauxConfig, VauxNet, and VauxProtocol are trademarks of Vaux Electronics, Inc. Other trademarks are owned by their respective companies.

Product specifications and availability are subject to change without notice. For the latest information, contact Vaux Electronics, Inc.
 ©1998-01 Vaux Electronics, Inc.
 Printed in the U.S.A. All rights reserved.