



LE-800AV

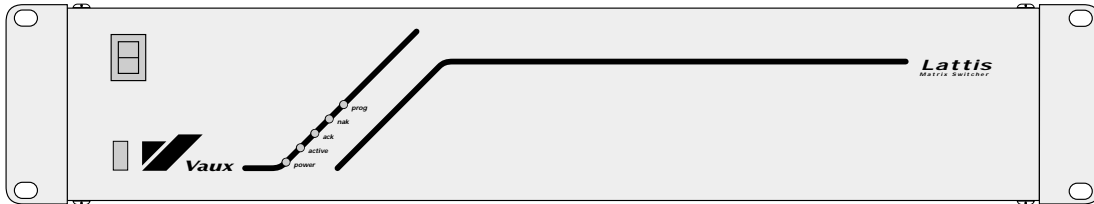

The Lattis LE-800AV is an 8-source by 8-zone Matrix Switcher for video and stereo audio routing and volume-control applications. A complete RS-232 protocol, as well as IR and keypad control capability, provides a flexible and expandable multi-zone audio system.

LE-800AV at a Glance:

- High-fidelity, 8x8 stereo audio and composite video matrix switcher
- Control via RS-232, IR remote, and/or wired keypads
- Video breakaway commands
- Volume, Bass, Treble, Balance, and Mute for each zone
- *Memory-Presets* for save & recall of different routing/volume states
- *Zone-Clusters* group various zones for concurrent routing/volume, in addition to independent control
- Any stereo zone can be *Paired-Mono* (same source, independent volume) for up to 16 mono zones
- Stack multiple switchers for up to 256 total stereo zones
- Program each zone's min/max/turn-on volume, mute level, ramp rates, etc.
- *Source-Leveling* for input trim
- Power-up to *Standby* or *Previous* routing/volume state
- Downloadable system software

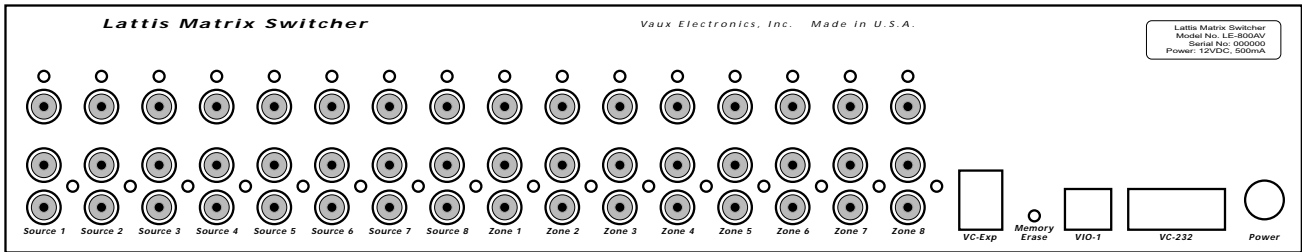

Lattis Model LE-800AV Specifications:

Audio Section:

Volume Adjustment Range (2 dB/step; off < -80 dB)	-64 to 0 dB
Bass Adjustment Range (3 dB/step; centered at 40 Hz)	-12 to +12 dB
Treble Adjustment Range (3 dB/step; centered at 15 KHz)	-12 to +12 dB
Input Impedance	47K ohm typ.
Output Impedance	100 ohm typ.
Frequency Response (into 47K ohm load; -3 dB rolloff)	15 Hz to 100 KHz
Input Signal Handling	2 Vrms max.
Zone Programmable: Min/Max/Turn-on Volume, Mute level, Passthrough, Mono/Stereo, etc.	

Video Section:

Input Impedance	75 ohms
Output Impedance	75 ohms
3 dB Bandwidth	12 MHz min.
Differential Gain	0.5% typ, 3% max.
Differential Phase	2 degrees max.
Non-Linearity	0.5% typ, 2% max

Input/Output Connectors:

Source x: Stereo Line-Level Audio and Composite Video Inputs (phono)	8
Zone x: Stereo Line-Level Audio and Composite Video Outputs (phono)	8
VC-232: RS-232 Control Port (DB-9 F)	1
VC-Exp: Expansion Port for RS-232 Daisy-Chain and Keypads (6P6C)	1
Power Jack (for 12 VDC, 500 mA Adapter, any polarity) (2.1 mm)	1

Other:

Power Consumption	12 VDC @ 500 mA typ.
Dimensions (2U rack chassis; 17" W body)	19" W x 3.5" H x 10" D

DSLE800AV.1298



1990 N. Alma School Rd., #345 • Chandler, AZ 85224
 FAX: (602) 821-6799 • PHONE: (602) 821-5482
 www.vauxelectronics.com • sales@vauxelectronics.com

Altrix, Aris, Lattis, MediaMation, Vaux, VauxConfig, VauxNet, and VauxProtocol are trademarks of Vaux Electronics, Inc.
 Other trademarks are owned by their respective companies.

Product specifications and availability are subject to change without notice.
 For the latest information, contact Vaux Electronics, Inc.
 ©1998 Vaux Electronics, Inc. Printed in the U.S.A. All rights reserved.